



- ◆
-
- ◆
-
- ◆
-
- ◆
-

35%.

IP67,

02



(FOPS)


CE

FOPS.



(OPS)

Off/On

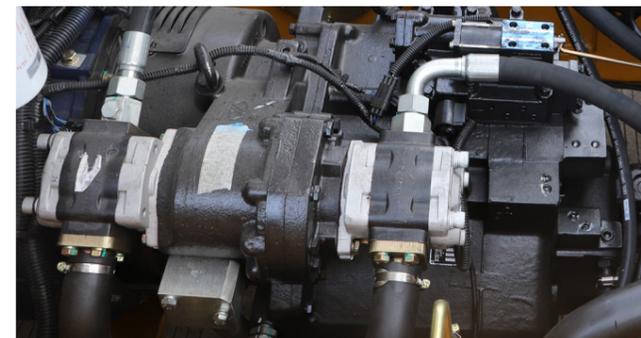


10%.





350

30
3000

Creo Parametric

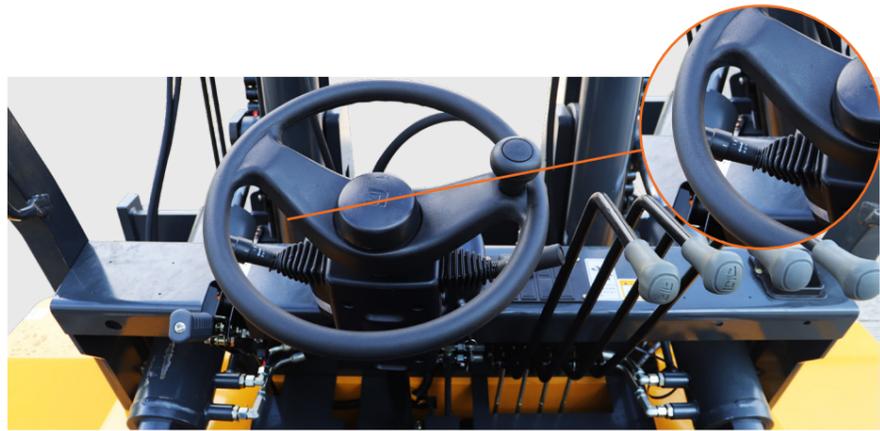

3,5-

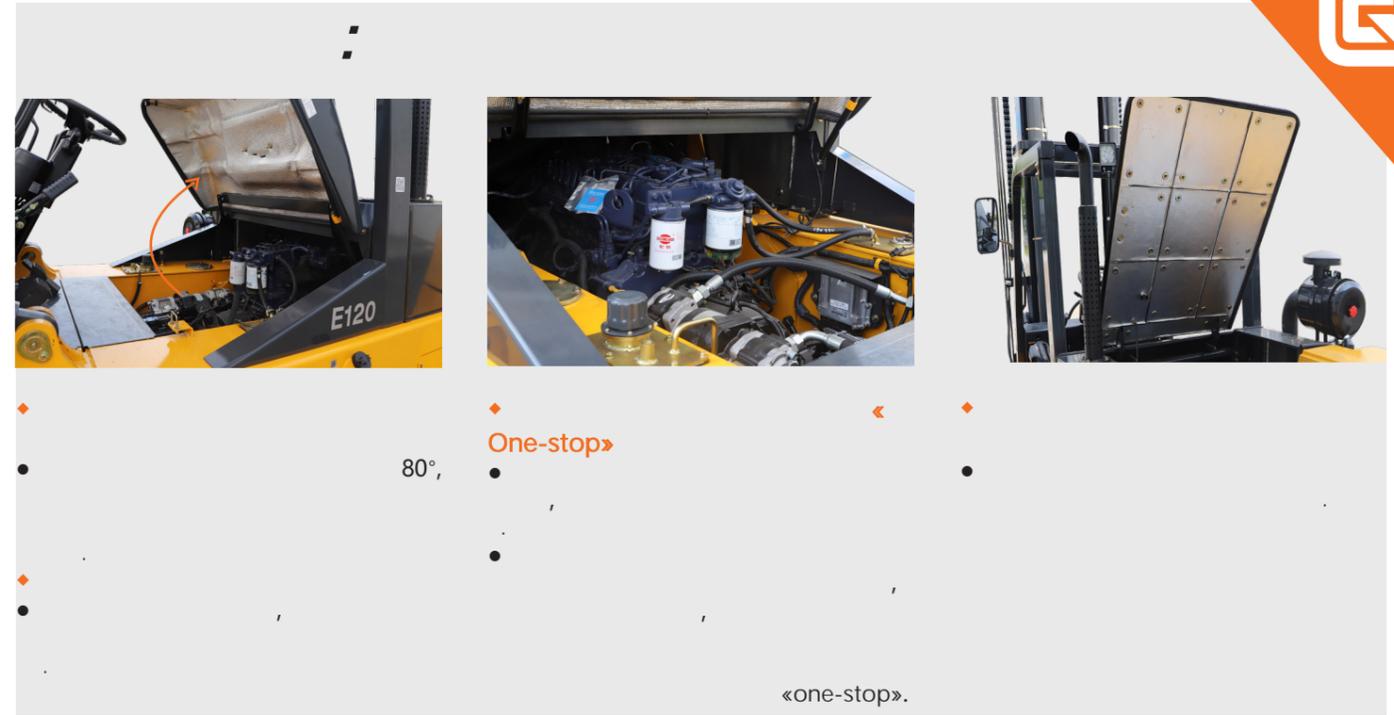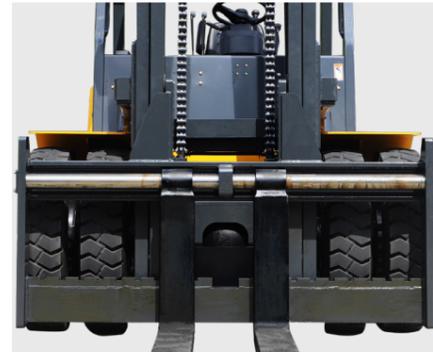

80°

One-stop»

«one-stop».

Common Rail

China IV Quanchai S65-160C41,
Bosch,

118
EGR+DOC+DPF,



%

8%,

	1			CPCD120-06	CPCD120-06
	2				
	3		kg	12000	12000
	4		mm	600	600
	5		kg	15300	15300
	6	/	kg	23978/6583	23978/6583
	7	/	kg	3397/8717	3397/8717
	8				
	9	/		4 / 2	4 / 2
	10		mm	3000	3000
	11			10.00-20-16PR	10.00-20-16PR
	12			10.00-20-16PR	10.00-20-16PR
	13	/	mm	1674/1844	1674/1844
	14		mm	3000	3000
	15		mm	0	0
	16		mm	3150	3150
	17		mm	4625	4625
	18	/	o	6 / 12	6 / 12
	19		mm	2300	2300
	20	/	mm	460/2180	460/2180
	21	x x	mm	80×175×1370	80×175×1370
	22		mm	4500	4500
	23		mm	2320	2320
	24		mm	2595	2595
	25		mm	4400	4400
	26		mm	730	730
	27		mm	6700	6700
	28		mm	260	260
	29		mm	350	350
	30	/	km/h	28/30	28/30
	31	/	mm/s	390/430	390/430
	32	/	mm/s	420/370	420/370
	33		kN	100	100
	35	/	%	29 / 31	29 / 31
	36			/	/
	37			/	/
	38			Quanchai	Yuchai
	39			S65-160C41	YCA07160-T480
	40			China IV	China IV
	41			6	6
	42		L	6.44	6.87
	43		kw/rpm	118/2200	118/2200
	44		N.m/rpm	700/1320-1650	670/1300-1600
	45		L	240	240
	46		V/Ah	2X12/120	2X12/120
	47				
	48	/		2/2	2/2
	49			-	-
	50		Mpa	16	16



	(mm)	(mm)	(/) (.)	(mm)	600mm(kg)		(kg)
	3000	3150	10/12	80	12000	12000	15300
	3500	3400	10/12	80	12000	12000	15420
	4000	3650	10/12	80	12000	12000	15530
	4500	3950	10/12	80	12000	11850	15790
	5000	4200	6/6	80	12000	11600	15910
	5500	4500	6/6	80	11700	11350	16050
	6000	4750	6/6	80	11500	11100	16160

