


	1				CPCD40
	2				
	3			kg	4000
	4			mm	500
	5			kg	5480
	6	,	/	kg	8335/1145
	7	,	/	kg	2225/3255
	8				
	9		/		2/2
	10			mm	1880
	11				250-15-18PR
	12				7.00-12-12PR
	13		/	mm	1180/1112
	14			mm	3000
	15			mm	130
	16	,		mm	2175
	17	,		mm	4180
	18	,	/	deg	6°/12°
	19			mm	1380
	20		/	mm	330/1380
	21	x	x	mm	122x50x1070
	22			mm	2950
	23			mm	1420
	24			mm	2175
	25			mm	2680
	26			mm	510
	27			mm	4460
	28			mm	145
	29			mm	175
	30		/	km/h	18.5/19
	31		/	mm/s	390/410
	32		/	mm/s	400/410
	33			N	19613
	34		/	%	20/18
	35				/ -
	36				/
	37				Xinchai
	38				A498BPG
	39		.		CHN Stage II
	40				4
	41			L	3.17
	42			kw/rpm	45/2500
	43	.		N.m/rpm	193/1800



LIUGONG

E

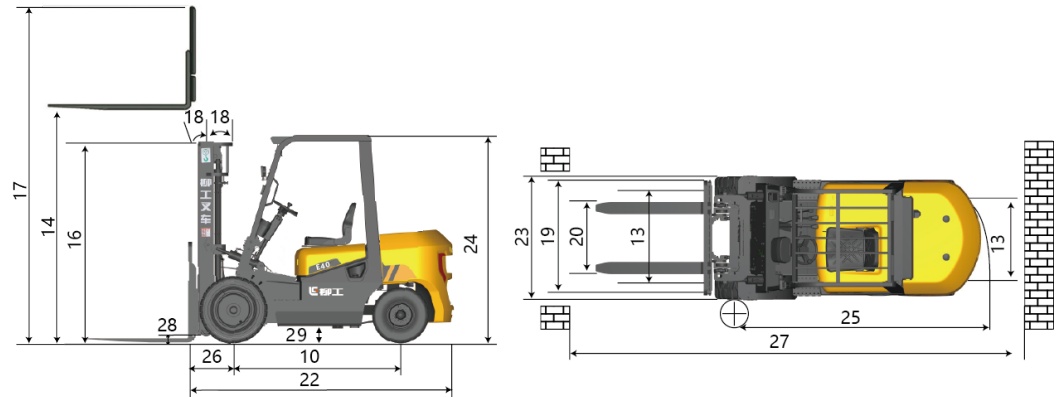

Xinchai

4000 kg
45 kW

CPCD40

E