## LIUGONG

EngineShangchai SC7H180G3Rated Power132 kW (177 hp / 179 ps) @ 2,200 rpmCompaction Width2,750 mmMax. Operating Weight26,000 kg

## 6526E ROLLER

TOUGH WORLD. TOUGH EQUIPMENT.

## 6526E SPECIFICATIONS >>>

| Tier 3 / Stage III                   |
|--------------------------------------|
| Shangchai                            |
| SC7H180G3                            |
| 132 kW (177 hp / 179 ps) @ 2,200 rpm |
| 770 N⋅m                              |
| 6                                    |
| Turbo, air-to-air aftercooled        |
| Water                                |
|                                      |

| ELECTRICAL SYSTEM |      |
|-------------------|------|
| System Voltage    | 24 V |

| DRIVE TRAIN                 |           |
|-----------------------------|-----------|
| Theoretical Gradeability    | 25 %      |
| Transmission Type           | Hydraulic |
| Working Speed               | 8 km/h    |
| Travel Speed                | 15 km/h   |
| Min. Outside Turning Radius | 9,000 mm  |


| STEERING                 |              |
|--------------------------|--------------|
| Steering System          | Hydraulic    |
| Steering Method          | Articulation |
| Steering Angle           | ± 30°        |
| Steering Relief Pressure | 16 MPa       |

| BRAKES                  |                                 |
|-------------------------|---------------------------------|
| Service Brake Type      | Hydraulic                       |
| Service Brake Actuation | Hydraulic                       |
| Parking Brake Actuation | Spring apply; Hydraulic release |

## **OPTIONAL EQUIPMENT**

Spilled Oil System Backup Alarm

| TIRES                            |                |
|----------------------------------|----------------|
| Tire Size                        | 11.00-20-16PR  |
| Tire Numbers                     | Front 5 Rear 6 |
| Ground Pressure                  | 200-420 kPa    |
| Tire Inflation Pressure          | 200-800 kPa    |
| Single Tire Load                 | 2,364 kg       |
| Overlapping of Front & Rear Tyre | 45 mm          |
| HYDRAULIC SYSTEM                 |                |
| Main Pump Type                   | Piston         |
| Main Relief Pressure             | 42 MPa         |
| OPERATING WEIGHT                 |                |
| Max. Operating Weight            | 26,000 kg      |
| Min. Operating Weight            | 15,000 kg      |
| SERVICE CAPACITIES               |                |
| Fuel Tank                        | 220 L          |
| Engine Oil                       | 20 L           |
| Hydraulic Oil Tank               | 60 L           |
| Cooling System                   | 32 L           |
| Sprinkler Tank                   | 500 L          |
| DIMENSIONS                       |                |
| A Overall Length                 | 4,970 mm       |
| B Overall Width                  | 2,800 mm       |
| C Compaction Width               | 2,750 mm       |
| D Tire Diameter                  | 1,080 mm       |
| F Wheelbase                      | 3,840 mm       |
| G Min. Ground Clearance          | 360 mm         |
| H Overall Height                 | 3,340 mm       |

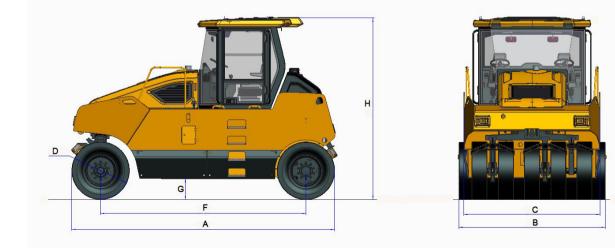

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China T: +86 772 3886124 E: overseas@liugong.com www.liugong.com 11/2022 Designed by LiuGong Replace the previous versions of 02/2022

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. LiuGong standard and optional equipment may vary from region to region. Please consult your LiuGong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.